

# VDO-1100FFT/R

## Fiber Optic Video & Audio Transmission 1-Channel Video + 1 Simplex Audio over Fiber



### System Design

Fiber Optic Video & Audio Transmitter & Receiver VDO-1100FFT/R provides for the digital transmission of 1-Channel Composite Video and 1-Channel simplex audio. Ideal for Broadcast/Studio ,CCTV audio and Professional AV applications.

Stand-alone or rack-mount. All units of VDO-1100FFT/R come in an insert card version. The cards can be inserted into our 14-slot, 19inch 2U or 19inch 4U rack-mountable card cage (VDO-CH02 or VDO-CH04).

Data

Audio


Single-Mode or Multi-Mode, VDO-1100FFT/R only can support FC /PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget.



## Ethernet Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- 24-Bit Digitally Encoded Audio over one Fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 2.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Support Coarse Wavelength Division Multiplexing (CWDM)
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM

### Typical Configuration

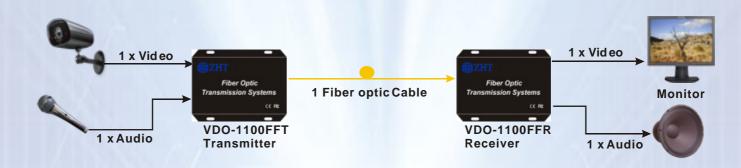



## Video & Audio over Fiber

#### Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power	Maximum Transmission
Transmitter	Receiver	Ther Mode	waverengtils	Budget	Distance
VDO-1100FFMT	VDO-1100FFMR	Multi-Mode	1310nm	16dB	2km
VDO-1100FFST	VDO-1100FFSR	Single-Mode	1310nm	12dB	20km
VDO-1100FFST-4	VDO-1100FFSR-4	Single-Mode	1310nm	18dB	40km
VDO-1100FFST-6	VDO-1100FFSR-6	Single-Mode	1550nm	25dB	60km

#### Note:

- The Optical Power Budget data fit Mulit-mode(62.5/125 µm), Single-Mode(9/125 µm).
- When using 50/125  $\,\mu\,m$  multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables.Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

#### Specification

• Video		Connectors	
Number of Channels: 1-0 Input/output impedance: BN Input/output Compatibility: PA Input/output voltage: 1.0 Bandwidth: 6.1 Bit Resolution: 8-0	BNC 75Ω PAL, NTSC, SECAM 1.0 Voltp-p 6.5MHZ 8-Bit Digital Transmission < 1.5% < 1.5° < 5%	Audio: Optical:	75Ω BNC (Gold Center Pin) Terminal Block FC (standard) Screw terminal block AC line cord
Differential Gain: < Differential Phase: < Tilt: < Signal-to-Noise Ratio(SNR): >		• Electrical & Mechanical	
		Input Power Requirements: Power Adapter:	AC 100V~240V
• Audio		Power Consumption: Stand-Alone Dimensions:	
Audio input/output Level: 6	Number of Channels: 1-Channel Simplex Audio Audio input/output Level: 6 dBm Audio in/output impedance: 600 Ω Balanced/Unbalanced Bandwidth: 10Hz ~ 20KHz Bit Resolution: 24-Bit ignal-to-Noise Ratio(SNR): > 80 dB	Card for 2U Rack Dimensions: Card for 4U Rack Dimensions: Shipping Weight:	
Bandwidth: 10		Environmental	
		5	

Due to continuous improvement, all products specifications are subject to change without further notice. Contact us for custom requirements. E-mail: Sales@zhtelecomm.com Website: www.zhtelecomm.com Tel: +86-01081593787 Fax: +86-01081593789