


Specification of Horizontal Optical Splice Closure MODEL: FOSC-H003

This product is used as closure are closure which accommodate the joint part of the cable

Picture:

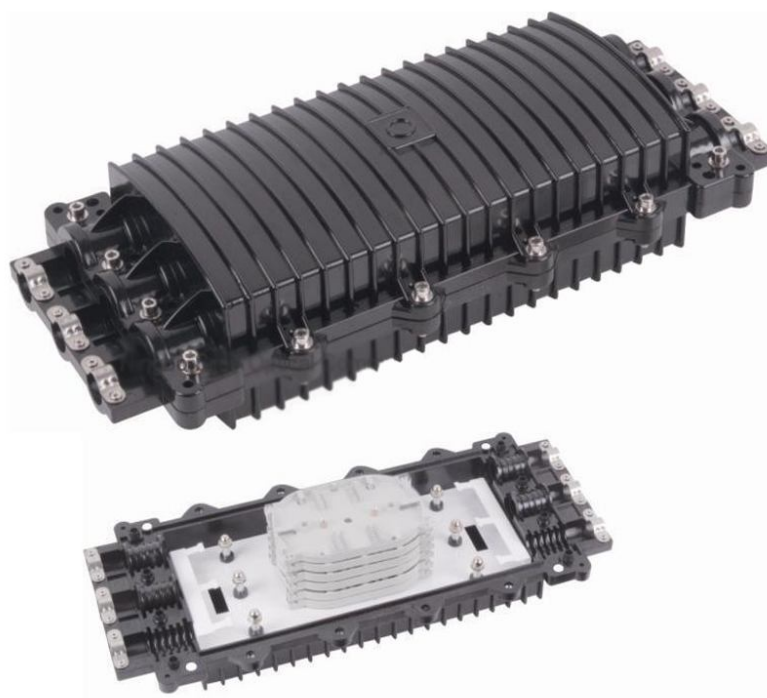

Application

- Aerial-hanger
- Wall-mounting
- Directly buried
- Specification

Model	Material	Dimension(cm)	Weight(kg)	Cable entry ports	Cable diameter(mm)	Max. capacity of fibers
FOSC-H003	PC	39*16*8	2	3in&3out	φ7-φ14	48

Features

Open type structure, High quality PC, ABS, PPR optional.
 Exteranal component and fastening pieces are all made of high quality stainless steel.
 Perfext out line ,thunder, erosion and aging resistance.
 Up to 48 core

Fittings

Splice protector tube, Sticky cincture, Sticky cincture, Cables ties, Hose clamp, Sealing washer, Plugs, Tape collar gauge, Marking note, Hanging hook, Allen wrench, Insulate robber belt.

Technical Parameters

Environmental temperature:	-5 °C ~+40°C
Operating temperature:	-5 °C ~+40 °C
Relative humidity:	≤85 %(+30 °C)
Atmosphere pressure:	60KPa±5KPa
Voltage resistance strength:	>15KV(DC)1 min non-puncture, no are-over

DYSFO

ShenZhen DYS Fiber optic Technology Co.,Ltd

Tel: 86-0755-29518585, 29650336 Fax : 86-0755-29510505 PC/ZIP: 518133

Add: 2/F, 7 Building, Tangtou Industrial Zone 3rd, Shiyan Town, BaoAn District, Shenzhen, P.R China

