


Fixed Rack-mount Fiber Optic Distribution Frame

Fixed Rack-mount Fiber Optic Distribution Frame with 1U, 2U, 3U distribution center holds up to 2 fusion splice trays and provides an economical way of splicing a small number of fiber cables in communication room or existing equipment racks where space is constrained.



ODF -RF12

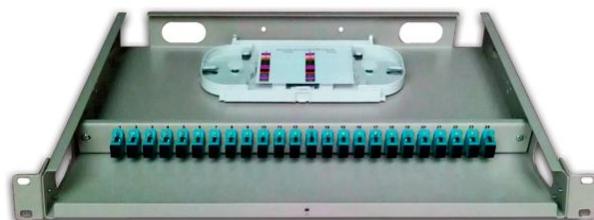

ODF -RF24




ODF -RF36



ODF -RF48



ODF -RF72

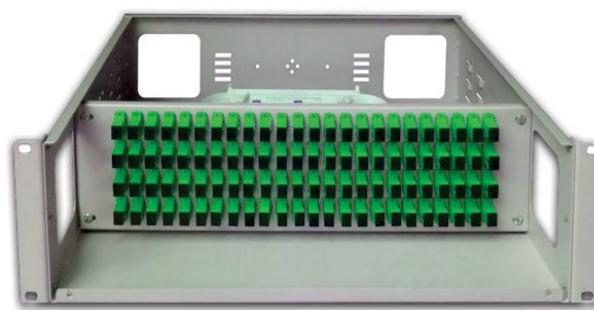

ODF -RF96



Application

- ❖ Telecommunications subscriber loop
- ❖ Fiber to the home (FTTH)
- ❖ LAN/WAN
- ❖ CATV

Side

Model	Fiber quantity	Height	Dimension(cm)	Weight(Kg)
ODF-RF12	12	1U	42x30x5	3.2
ODF-RF24	24	1U	42x30x5	3.4
ODF-RF36	36	2U	42x30x10	4.0
ODF-RF48	48	2U	42x30x10	4.2
ODF-RF72	72	3U	42x30x15	5.0
ODF-RF96	96	3U	42x30x15	5.2

Features

- ❖ Standard size, light weight and reasonable structure
- ❖ Compact design for space saving
- ❖ Suitable for ribbon and single fiber
- ❖ Various panel plate to fit different adapter interface
- ❖ Front access panel design for easy operation
- ❖ Suitable for 19" or 23" standard optic distribution cabinets

Fittings

Splice protector tube, Sticky cincture, Sticky cincture, Cables ties, Hose clamp, Sealing washer, Plugs, Tape collar gauge, Marking note, Hanging hook, Allen wrench, Insulate rubber belt.

Technical Parameters

Environmental temperature:	-5 °C ~+60°C
Operating temperature:	-5 °C ~+40 °C
Relative humidity:	≤85 %(+30 °C)
Atmosphere pressure:	70~100Kpa
Voltage resistance strength:	>2000V(DC)1 min non-puncture, no are-over

DYSFO

ShenZhen DYS Fiber optic Technology Co.,Ltd

Tel: 86-0755-29518585, 29650336 Fax : 86-0755-29510505 PC/ZIP: 518133

Add: 2/F, 7 Building, Tangtou Industrial Zone 3rd, Shiyan Town, BaoAn District, Shenzhen, P.R China

