

Fiber Optic Video Transmission for Fixed Cameras 1-Channel Composite Video over Fiber

1 →
Video

System Design

Fiber Optic Video Transmitter & Receiver VDO-1000FT/R can transmission 1-Channel digital composite video over fiber for fixed camera, no audio, no data.

Audio

Stand-alone or rack-mount. All units of VDO-1000FT/R come in an insert card version. The cards can be inserted into our 14-slot, 19inch 2U or 4U rack-mountable card cage (VDO-CH02 or VDO-CH04).

Data

Single-Mode or Multi-Mode, VDO-1000FT/R only can support FC /PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km.


Ethernet

Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 2.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Support Coarse Wavelength Division Multiplexing (CWDM)
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM



Typical Configuration

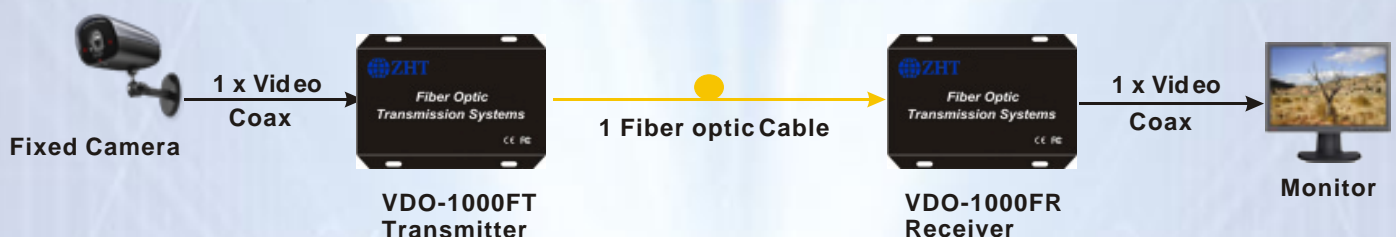



Composite Video over Fiber

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VDO-1000FMT	VDO-1000FMR	Multi-Mode	1310nm	16dB	2km
VDO-1000FST	VDO-1000FSR	Single-Mode	1310nm	12dB	20km
VDO-1000FST-4	VDO-1000FSR-4	Single-Mode	1310nm	18dB	40km
VDO-1000FST-6	VDO-1000FSR-6	Single-Mode	1550nm	25dB	60km

Note:

- The Optical Power Budget data fit Multi-mode(62.5/125 μm), Single-Mode(9/125 μm).
- When using 50/125 μm multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

<ul style="list-style-type: none"> • Video <ul style="list-style-type: none"> Number of Channels: 1-Channel Video Input/output impedance: BNC 75Ω Input/output Compatibility: PAL, NTSC, SECAM Input/output voltage: 1.0 Volt p-p Bandwidth: 6.5MHZ Bit Resolution: 8-Bit Digital Transmission Differential Gain: < 1.5% Differential Phase: < 1.5° Tilt: < 5% Signal-to-Noise Ratio(SNR): > 67 dB • Environmental <ul style="list-style-type: none"> Operating Temperature: -45° C ~ +75° C Storage Temperature: -45° C ~ +85° C Relative Humidity: 0% ~ 95% (non-condensing) MTBF: > 100,000 hours 	<ul style="list-style-type: none"> • Connectors <ul style="list-style-type: none"> Video: 75Ω BNC (Gold Center Pin) Optical: FC (standard) Stand-Alone Power: Screw terminal block Rack Power: AC line cord • Electrical & Mechanical <ul style="list-style-type: none"> Input Power Requirements: DC 5V@2A Power Adapter: AC 100V~240V Power Consumption: < 3W Stand-Alone Dimensions: 95mm × 70mm × 25mm Card for 2U Rack Dimensions: 95mm × 70mm × 25mm Card for 4U Rack Dimensions: 145mm × 170mm × 20mm Shipping Weight: 1.2kg (include TX & RX)
---	---

Due to continuous improvement, all products specifications are subject to change without further notice. Contact us for custom requirements. E-mail: Sales@zhtelecomm.com Website: www.zhtelecomm.com
Tel: +86-01081593787 Fax: +86-01081593789