

Fiber Optic Video Transmission for Fixed Cameras 16-Channel Composite Video over Fiber

16 →

Video

System Design

Fiber Optic Video Transmitter & Receiver VDO-16000FT/R can transmission 16-Channel digital composite video over fiber optical cable for fixed camera, no audio, no data.

Audio

Stand-alone or rack-mount. All units of VDO-16000FT/R come in an insert card version. The cards can be inserted into our 14-slot, 19inch 10U rack-mountable card cage (VDO-CH10).

Data

Single-Mode or Multi-Mode, VDO-16000FT/R can support FC/PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km.


Ethernet

Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 1.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Support Coarse Wavelength Division Multiplexing (CWDM)
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM



Typical Configuration

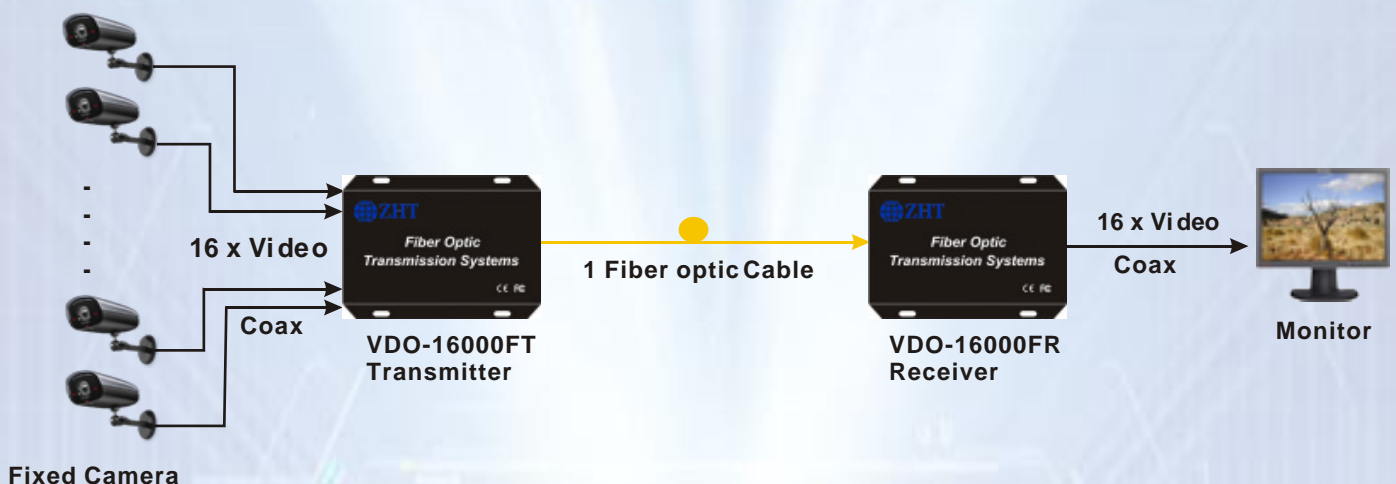



Composite Video over Fiber

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VDO-16000FMT	VDO-16000FMR	Multi-Mode	1310nm	10dB	1.0km
VDO-16000FST	VDO-16000FSR	Single-Mode	1310nm	12dB	20km
VDO-16000FST-4	VDO-16000FSR-4	Single-Mode	1310nm	18dB	40km

Note:

- The Optical Power Budget data fit Multi-mode(62.5/125 μ m), Single-Mode(9/125 μ m).
- When using 50/125 μ m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

<ul style="list-style-type: none"> • Video <ul style="list-style-type: none"> Number of Channels: 16-Channel Video Input/output impedance: BNC 75Ω Input/output Compatibility: PAL, NTSC, SECAM Input/output voltage: 1.0 Volt p-p Bandwidth: 6.5MHZ Bit Resolution: 8-Bit Digital Transmission Differential Gain: < 1.5% Differential Phase: < 1.5° Tilt: < 5% Signal-to-Noise Ratio(SNR): > 67 dB • Environmental <ul style="list-style-type: none"> Operating Temperature: -45° C ~ +75° C Storage Temperature: -45° C ~ +85° C Relative Humidity: 0% ~ 95% (non-condensing) MTBF: >100,000 hours 	<ul style="list-style-type: none"> • Connectors <ul style="list-style-type: none"> Video: 75Ω BNC (Gold Center Pin) Optical: FC (standard), ST Optional Stand-Alone Power: Screw terminal block Rack Power: AC line cord • Electrical & Mechanical <ul style="list-style-type: none"> Input Power Requirements: DC 5V@4A Power Adapter: AC 100V~240V (Built-in) Power Consumption: < 10W Stand-Alone Dimensions: 483mm \times 250mm \times 44.5mm Card for 10U Dimensions: 452mm \times 250mm \times 40mm Shipping Weight: 6.0kg (include TX & RX)
---	---

Due to continuous improvement, all products specifications are subject to change without further notice. Contact us for custom requirements. E-mail: Sales@zhtelecomm.com Website: www.zhtelecomm.com
Tel: +86-01081593787 Fax: +86-01081593789