

### Fiber Optic Video & Audio Transmission 4-Channel Video + 4 Duplex Audio over Fiber

4 →

Video

#### System Design

Fiber Optic Video & Audio Transmitter & Receiver VDO-4400FDT/R provides for the digital transmission of 4 Channels Composite Video and 4-channel Duplex audio. Ideal for Broadcast/Studio, CCTV audio and Professional AV applications.

← 4 →

Audio

Stand-alone or rack-mount. All units of VDO-4400FDT/R come in an insert card version. The cards can be inserted into our 14-slot, 19inch 4U rack-mountable card cage (VDO-CH04). One 4-Channel video and 4 duplex audio card require two slots widths.

Data

Single-Mode or Multi-Mode, VDO-4400FDT/R can support FC /PC or ST/PC optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget.


Ethernet



#### Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- 24-Bit Digitally Encoded Audio over one Fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 1.5 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Support Coarse Wavelength Division Multiplexing (CWDM)
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM

#### Typical Configuration

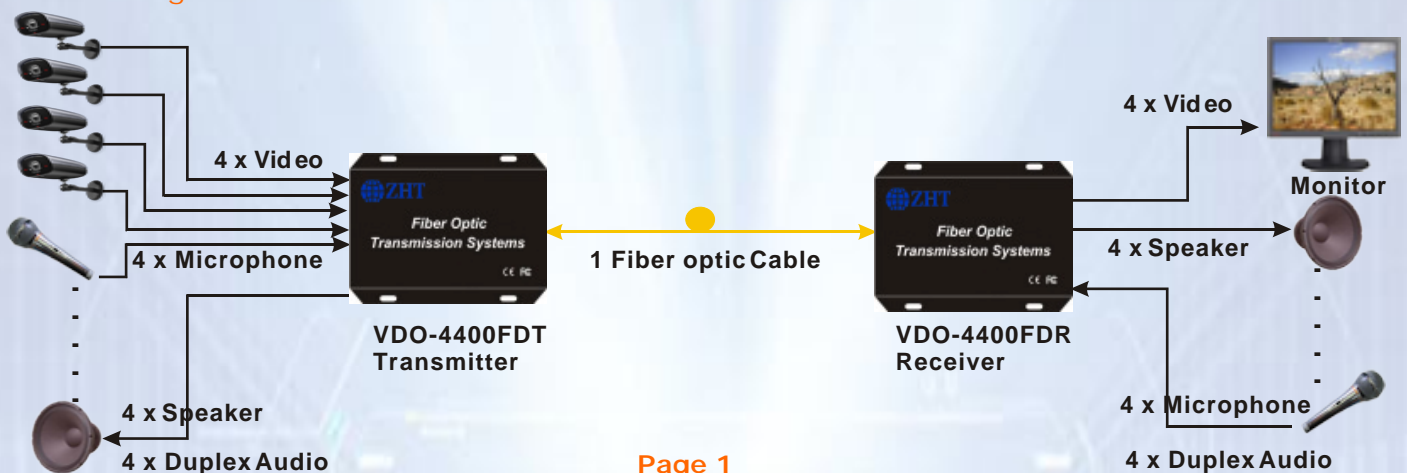



# Video & Audio over Fiber

## Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VDO-4400FDMT	VDO-4400FDMR	Multi-Mode	1310nm/1550nm	12dB	1.5km
VDO-4400FDST	VDO-4400FDSR	Single-Mode	1310nm/1550nm	12dB	20km
VDO-4400FDST-4	VDO-4400FDSR-4	Single-Mode	1310nm/1550nm	18dB	40km
VDO-4400FDST-6	VDO-4400FDSR-6	Single-Mode	1310nm/1550nm	25dB	60km

**Note:**

- The Optical Power Budget data fit Mult-mode(62.5/125 μ m), Single-Mode(9/125 μ m).
- When using 50/125 μ m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

## Specification

<ul style="list-style-type: none"> <li>• Video           <ul style="list-style-type: none"> <li>Number of Channels: 4-Channel Video</li> <li>Input/output impedance: BNC 75Ω</li> <li>Input/output Compatibility: PAL, NTSC, SECAM</li> <li>Input/output voltage: 1.0 Volt p-p</li> <li>Bandwidth: 6.5MHZ</li> <li>Bit Resolution: 8-Bit Digital Transmission</li> <li>Differential Gain: &lt; 1.5%</li> <li>Differential Phase: &lt; 1.5°</li> <li>Tilt: &lt; 5%</li> <li>Signal-to-Noise Ratio(SNR): &gt; 67 dB</li> </ul> </li> <li>• Audio           <ul style="list-style-type: none"> <li>Number of Channels: 4 Channels Duplex Audio</li> <li>Audio input/output Level: 6 dBm</li> <li>Audio in/output impedance: 600Ω Balanced/Unbalanced</li> <li>Bandwidth: 10Hz ~ 20KHz</li> <li>Bit Resolution: 24-Bit</li> <li>Signal-to-Noise Ratio(SNR): &gt; 80 dB</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Connectors           <ul style="list-style-type: none"> <li>Video: 75Ω BNC (Gold Center Pin)</li> <li>Audio: Terminal Block</li> <li>Optical: FC (standard), ST Optional</li> <li>Stand-Alone Power: Screw terminal block</li> <li>Rack Power: AC line cord</li> </ul> </li> <li>• Electrical &amp; Mechanical           <ul style="list-style-type: none"> <li>Input Power Requirements: DC 5V@3A</li> <li>Power Adapter: AC 100V~240V</li> <li>Power Consumption: &lt; 5W</li> <li>Stand-Alone Dimensions: 176.5mm × 158mm × 59mm</li> <li>Card for 4U Rack Dimensions: 145mm × 170mm × 45.4mm</li> <li>Shipping Weight: 2.5kg (include TX &amp; RX)</li> </ul> </li> <li>• Environmental           <ul style="list-style-type: none"> <li>Operating Temperature: -45° C~+75° C</li> <li>Storage Temperature: -45° C~+85° C</li> <li>Relative Humidity: 0%~95% (non-condensing)</li> <li>MTBF: &gt;100,000 hours</li> </ul> </li> </ul>
---	--

**Due to continuous improvement, all products specifications are subject to change without further notice.**

**Contact us for custom requirements. E-mail: [Sales@zhtelecomm.com](mailto:Sales@zhtelecomm.com) Website: [www.zhtelecomm.com](http://www.zhtelecomm.com)**

**Tel: +86-01081593787**

**Fax: +86-01081593789**